

## Neon Flex

### Product Specification

|                                |                     |
|--------------------------------|---------------------|
| Color type                     | <b>Single Color</b> |
| Output color                   | <b>Orange</b>       |
| CRI                            | -                   |
| Decoding IC                    | -                   |
| LED/ Pixel                     | -                   |
| Control type                   | <b>PWM</b>          |
| Voltage (V)                    | <b>24</b>           |
| Power (W/m)                    | <b>16</b>           |
| Efficacy (Lm/W)                | <b>20.1</b>         |
| Luminous flux (Lm/M)           | <b>322</b>          |
| Beam angle (°)                 | <b>360</b>          |
| Cutting interval (mm)          | <b>35.71</b>        |
| Maximum length single feed (m) | <b>5</b>            |
| Maximum length double feed (m) | -                   |
| Width (mm)                     | <b>19</b>           |
| Height (mm)                    | <b>19</b>           |
| Bending radius (mm)            | <b>120</b>          |
| Weight (kg)                    | -                   |
| Operating temperature (°C)     | <b>-20~+60</b>      |
| Storage temperature (°C)       | -                   |
| IP rating                      | <b>65</b>           |
| Warranty (year)                | -                   |

Approvals




### Product information


|                  |                       |
|------------------|-----------------------|
| Product category | <b>Neon Flex</b>      |
| Neonflex type    | <b>3D bending</b>     |
| Product name     | <b>VNL-3D19R-24-O</b> |




### Technical drawing

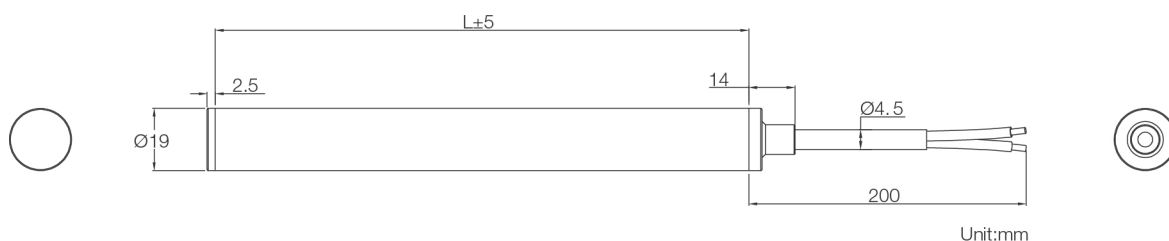

### System Diagram: RF

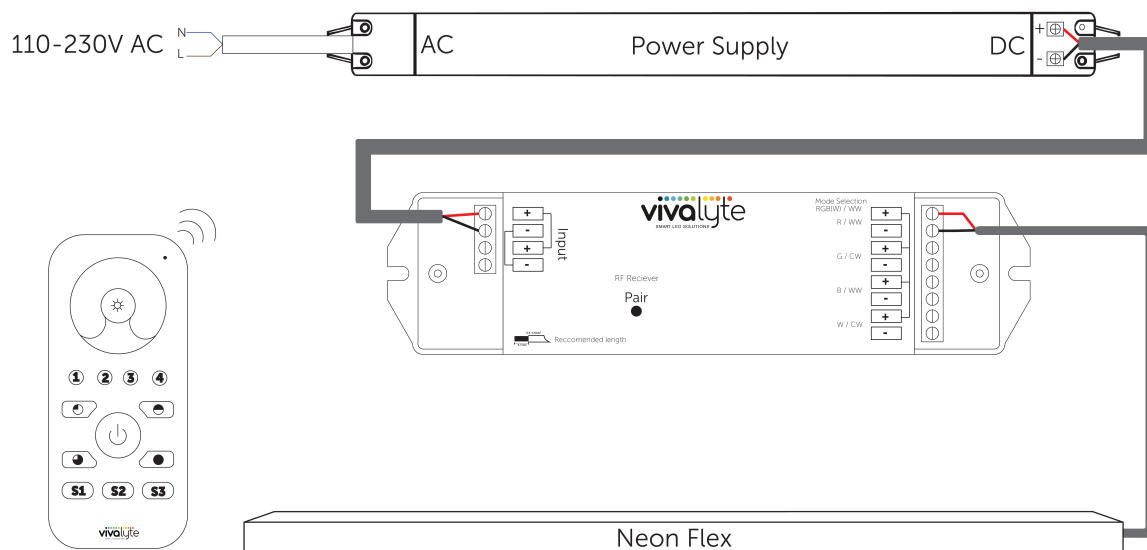

### System Diagram: DALI

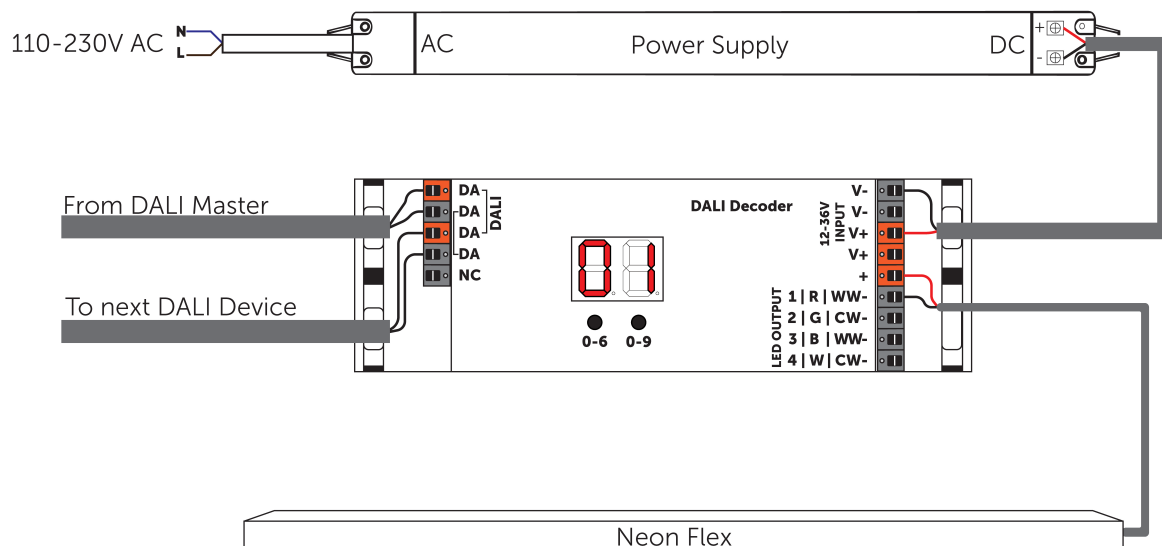

## System Diagram: DMX

