

## Neon Flex

### Product Specification

|                                |              |
|--------------------------------|--------------|
| Color type                     | Single Color |
| Output color                   | 4000         |
| CRI                            | 90           |
| Decoding IC                    | -            |
| LED/ Pixel                     | -            |
| Control type                   | PWM          |
| Voltage (V)                    | 24           |
| Power (W/m)                    | 24           |
| Efficacy (Lm/W)                | 70           |
| Luminous flux (Lm/M)           | 1680         |
| Beam angle (°)                 | 360          |
| Cutting interval (mm)          | -            |
| Maximum length single feed (m) | 3            |
| Maximum length double feed (m) | -            |
| Width (mm)                     | 32           |
| Height (mm)                    | 32           |
| Bending radius (mm)            | 300          |
| Weight (kg)                    | -            |
| Operating temperature (°C)     | -            |
| Storage temperature (°C)       | -            |
| IP rating                      | 67           |
| Warranty (year)                | -            |

Approvals




### Product information


|                  |                     |
|------------------|---------------------|
| Product category | Neon Flex           |
| Neonflex type    | 3D bending          |
| Product name     | VNL-3D32R-24-40K-HE |




### Technical drawing

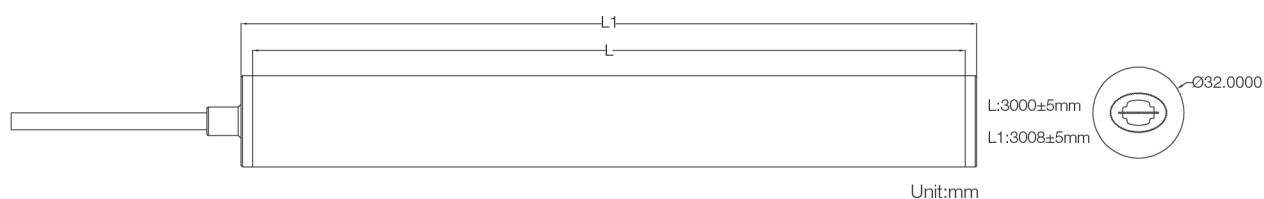

### System Diagram: RF

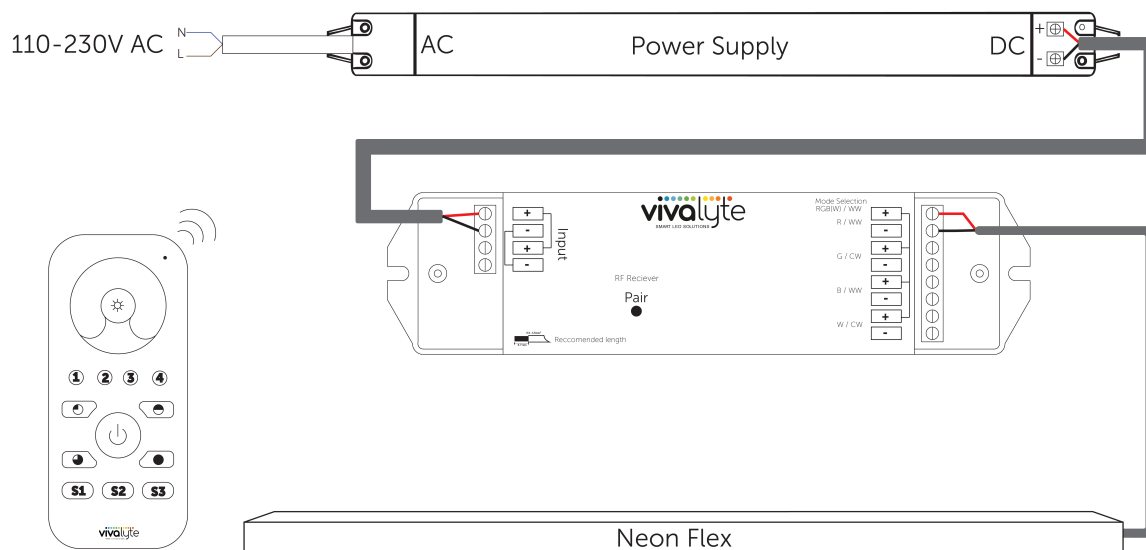

### System Diagram: DALI

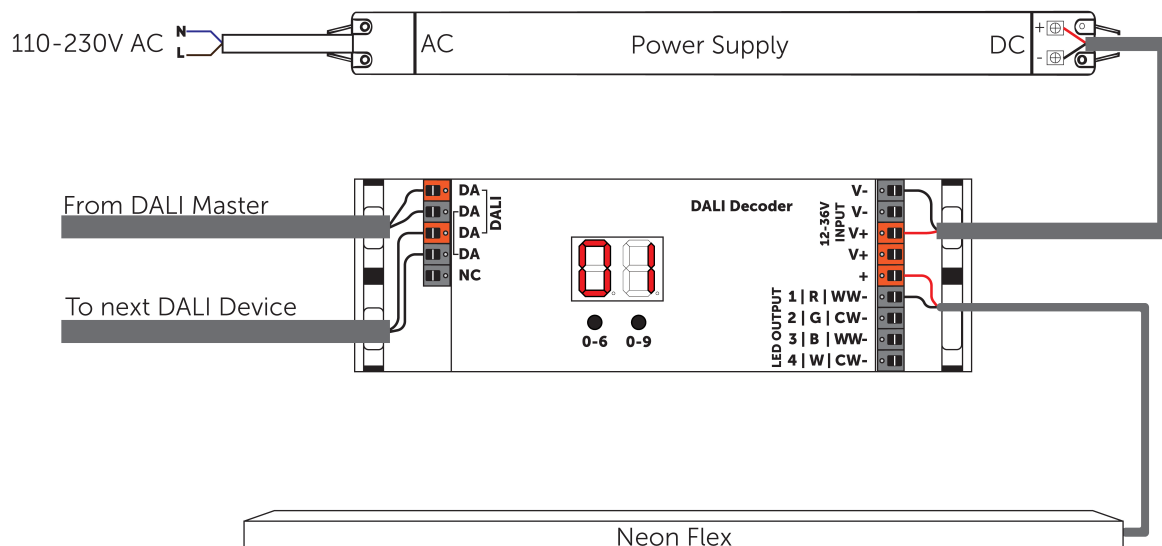

## System Diagram: DMX

