

Neon Flex

Product Specification

| | |
|--------------------------------|----------------------------|
| Color type | RGBW |
| Output color | Red,Green,Blue,5000 |
| CRI | 90 |
| Decoding IC | - |
| LED/ Pixel | - |
| Control type | PWM |
| Voltage (V) | 24 |
| Power (W/m) | 24.2 |
| Efficacy (Lm/W) | 27 |
| Luminous flux (Lm/M) | 663 |
| Beam angle (°) | 360 |
| Cutting interval (mm) | - |
| Maximum length single feed (m) | 3 |
| Maximum length double feed (m) | - |
| Width (mm) | 32 |
| Height (mm) | 32 |
| Bending radius (mm) | 300 |
| Weight (kg) | - |
| Operating temperature (°C) | - |
| Storage temperature (°C) | - |
| IP rating | 67 |
| Warranty (year) | - |

Approvals




Product information


| | |
|------------------|------------------------------|
| Product category | Neon Flex |
| Neonflex type | 3D bending |
| Product name | VNL-3D32R-24-RGBW-50K |




Technical drawing

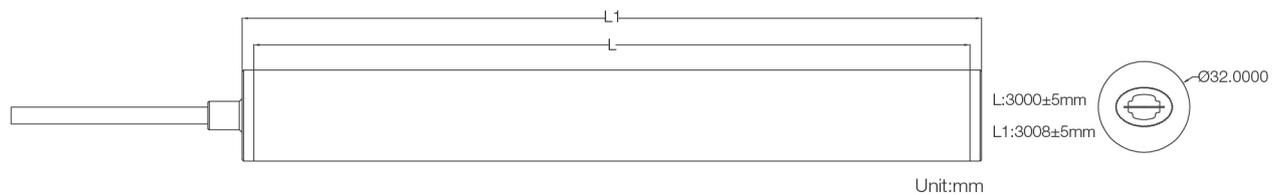

System Diagram: RF

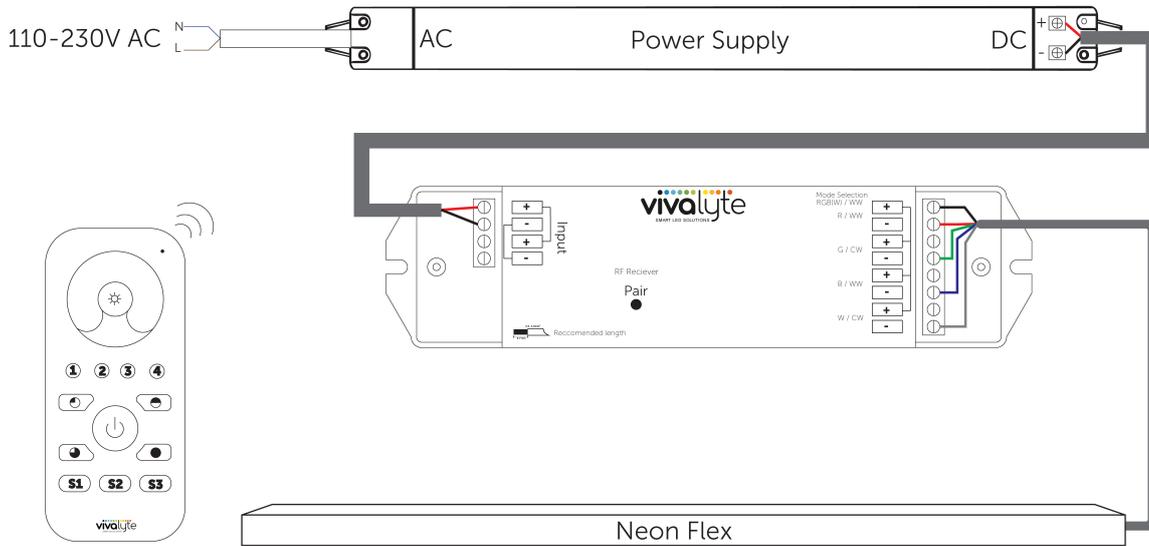

System Diagram: DALI

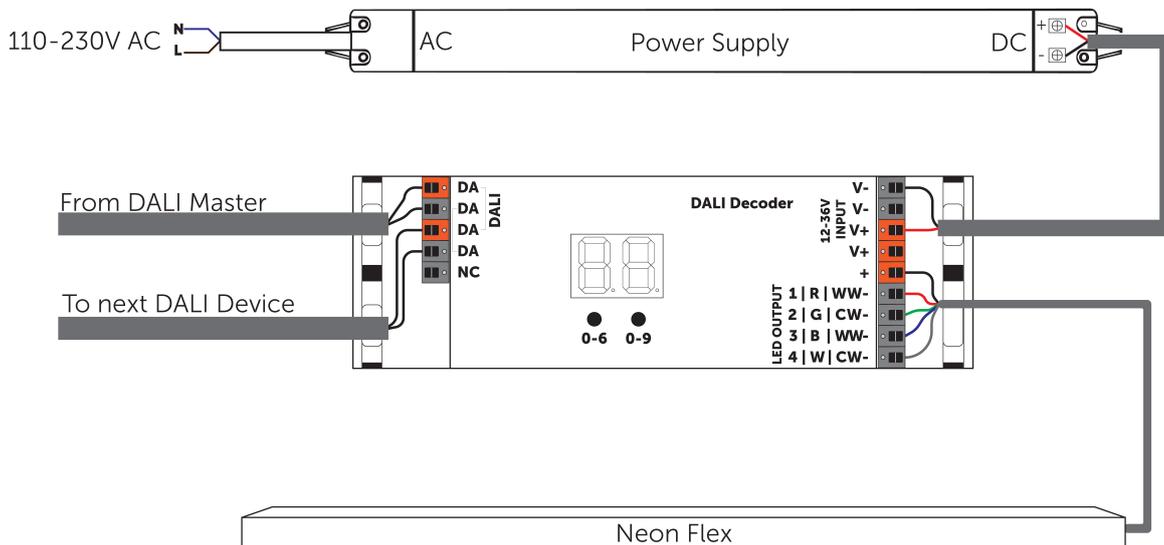

System Diagram: DMX

