

## Neon Flex

## Product Specification

|                                |              |
|--------------------------------|--------------|
| Color type                     | Single Color |
| Output color                   | 3500         |
| CRI                            | 80           |
| Decoding IC                    | -            |
| LED/ Pixel                     | -            |
| Control type                   | PWM          |
| Voltage (V)                    | 24           |
| Power (W/m)                    | 11.5         |
| Efficacy (Lm/W)                | 62.3         |
| Luminous flux (Lm/M)           | 727          |
| Beam angle (°)                 | 165          |
| Cutting interval (mm)          | 41.66        |
| Maximum length single feed (m) | 15           |
| Maximum length double feed (m) | -            |
| Width (mm)                     | 14           |
| Height (mm)                    | 14           |
| Bending radius (mm)            | 60           |
| Weight (kg)                    | -            |
| Operating temperature (°C)     | -20~+60      |
| Storage temperature (°C)       | -            |
| IP rating                      | 68           |
| Warranty (year)                | -            |

Approvals




## Product information


|                  |                 |
|------------------|-----------------|
| Product category | Neon Flex       |
| Neonflex type    | Frontbending    |
| Product name     | VNL-F14C-24-35K |




## Technical drawing

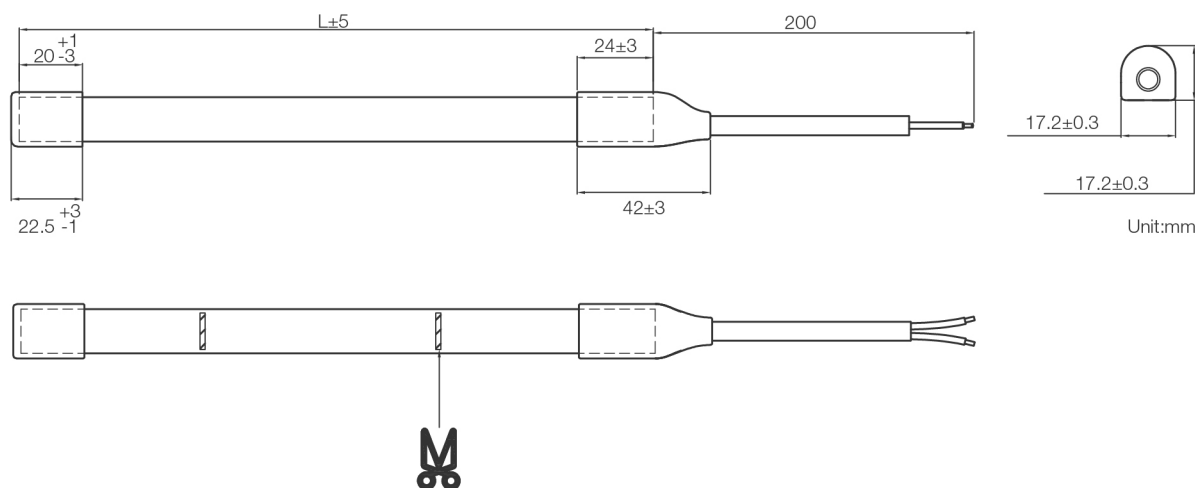

### System Diagram: RF

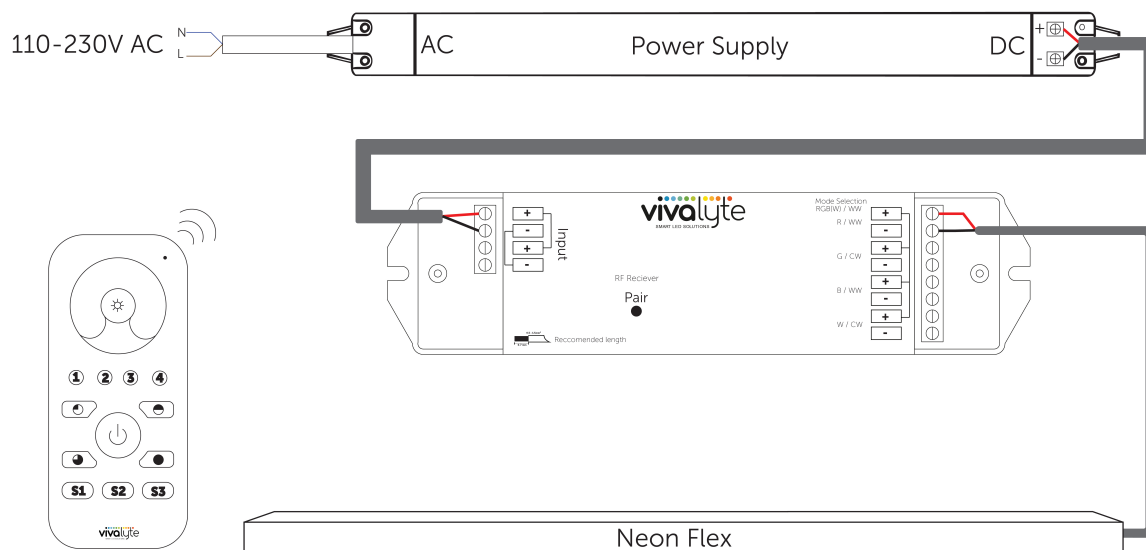

### System Diagram: DALI

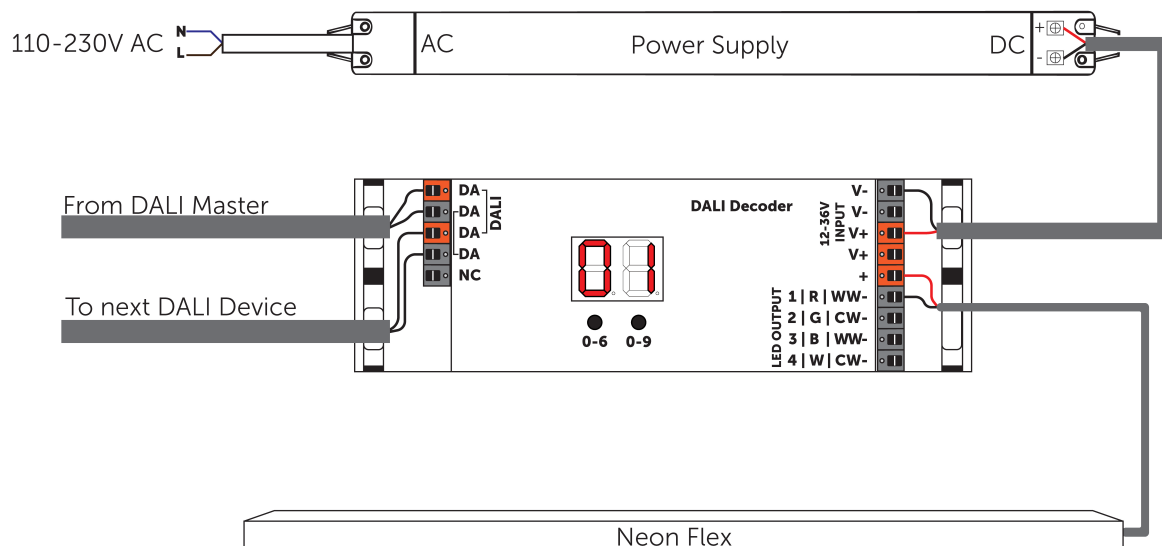

## System Diagram: DMX

