

## Neon Flex

### Product Specification


Color type	<b>Single Color</b>
Output color	<b>2300</b>
CRI	<b>80</b>
Decoding IC	<b>none</b>
LED/ Pixel	<b>-</b>
Control type	<b>PWM</b>
Voltage (V)	<b>24</b>
Power (W/m)	<b>17.2</b>
Efficacy (Lm/W)	<b>55.7</b>
Luminous flux (Lm/M)	<b>925</b>
Beam angle (°)	<b>115</b>
Cutting interval (mm)	<b>62.5</b>
Maximum length single feed (m)	<b>10</b>
Maximum length double feed (m)	<b>-</b>
Width (mm)	<b>16</b>
Height (mm)	<b>17</b>
Bending radius (mm)	<b>120</b>
Weight (kg)	<b>19.25</b>
Operating temperature (°C)	<b>-20~+60</b>
Storage temperature (°C)	<b>-</b>
IP rating	<b>67</b>
Warranty (year)	<b>-</b>

### Approvals



### Product information


Product category	<b>Neon Flex</b>
Neonflex type	<b>Frontbending</b>
Product name	<b>VNL-F16F-24-23K</b>

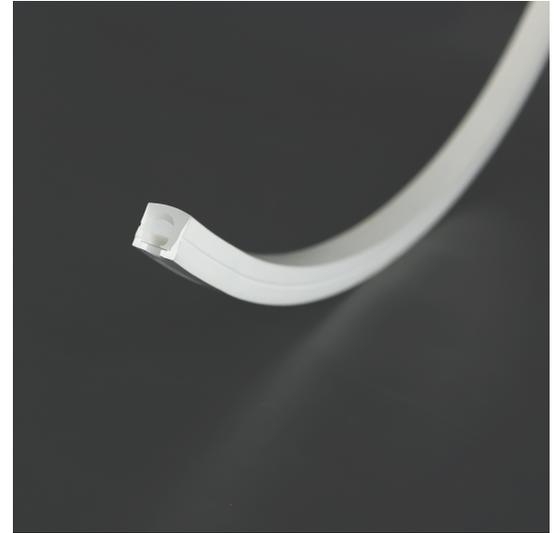


### Technical drawing



### System Diagram: RF

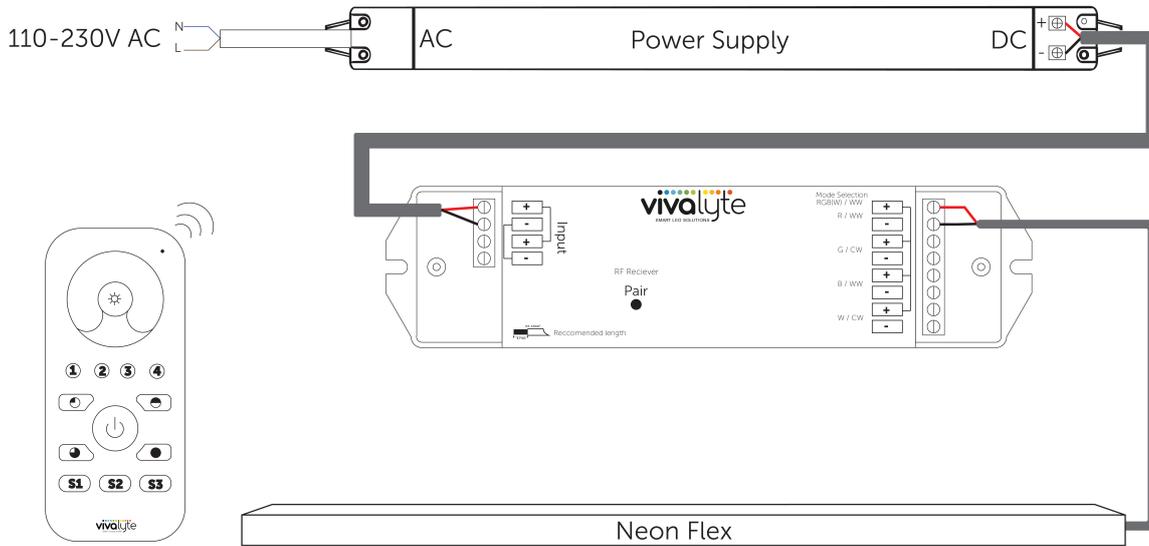

### System Diagram: DALI

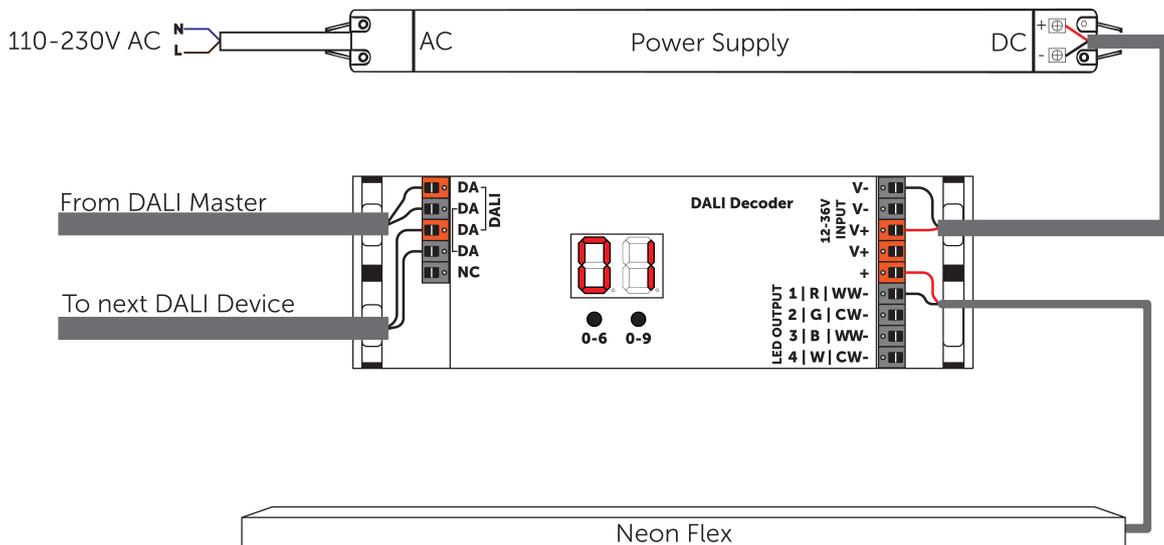

### System Diagram: DMX

