

## Neon Flex

### Product Specification


Color type	<b>Single Color</b>
Output color	<b>5000</b>
CRI	<b>80</b>
Decoding IC	-
LED/ Pixel	-
Control type	<b>PWM</b>
Voltage (V)	<b>48</b>
Power (W/m)	<b>9.6</b>
Efficacy (Lm/W)	<b>64</b>
Luminous flux (Lm/M)	<b>580</b>
Beam angle (°)	<b>110</b>
Cutting interval (mm)	<b>100</b>
Maximum length single feed (m)	<b>35</b>
Maximum length double feed (m)	-
Width (mm)	<b>16</b>
Height (mm)	<b>17</b>
Bending radius (mm)	<b>120</b>
Weight (kg)	-
Operating temperature (°C)	<b>-20~+60</b>
Storage temperature (°C)	-
IP rating	<b>68</b>
Warranty (year)	-

Approvals




### Product information

Product category	<b>Neon Flex</b>
Neonflex type	<b>Frontbending</b>
Product name	<b>VNL-F16F-48-50K</b>

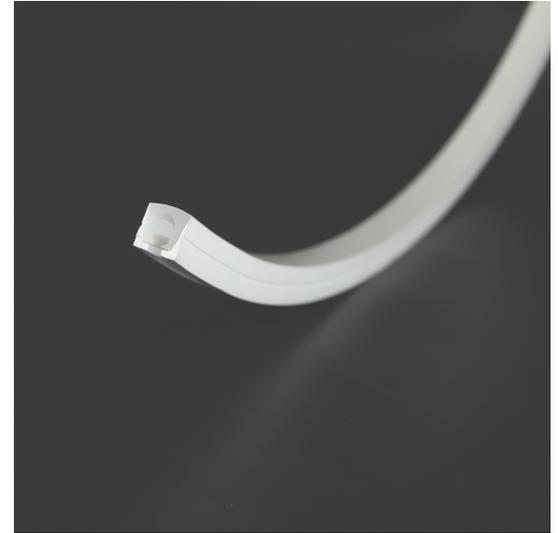


### Technical drawing

## System Diagram: RF

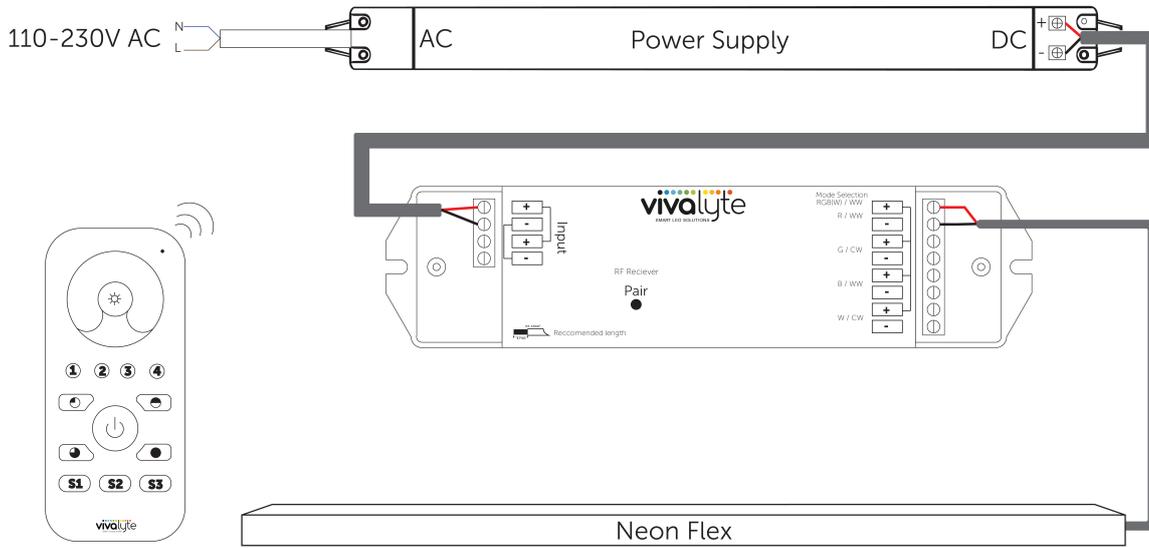

## System Diagram: DALI

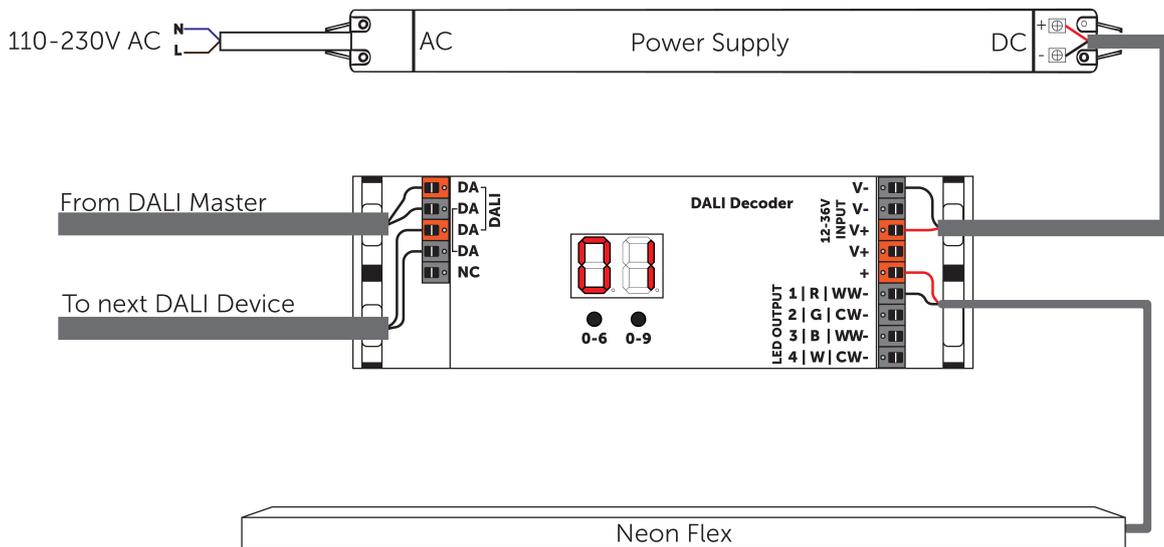

### System Diagram: DMX

