# VNL-S10C-230-G

## Neon Flex

### Product Specification

| | |
|---|---|
| Color type | **Single Color** |
| Output color | **Green** |
| CRI | **-** |
| Decoding IC | **-** |
| LED/ Pixel | **-** |
| Control type | **ON-OFF** |
| Voltage (V) | **230** |
| Power (W/m) | **10** |
| Efficacy (Lm/W) | **42** |
| Luminous flux (Lm/M) | **420** |
| Beam angle (°) | **184** |
| Cutting interval (mm) | **500** |
| Maximum length single feed (m) | **50** |
| Maximum length double feed (m) | **-** |
| Width (mm) | **10** |
| Height (mm) | **25** |
| Bending radius (mm) | **-** |
| Weight (kg) | **-** |
| Operating temperature (°C) | **-20~+60** |
| Storage temperature (°C) | **-** |
| IP rating | **67** |
| Warranty (year) | **-** |

Approvals

### Product information

| | |
|---|---|
| Product category | **Neon Flex** |
| Neonflex type | **Sidebending** |
| Product name | **VNL-S10C-230-G** |

## Technical drawing

## System Diagram: RF

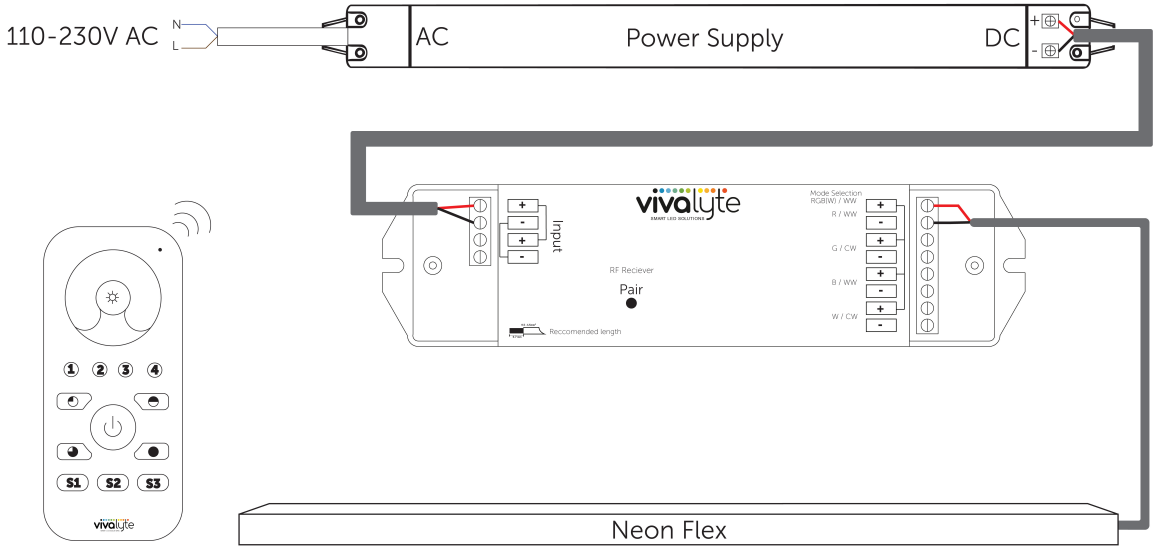


## System Diagram: DALI

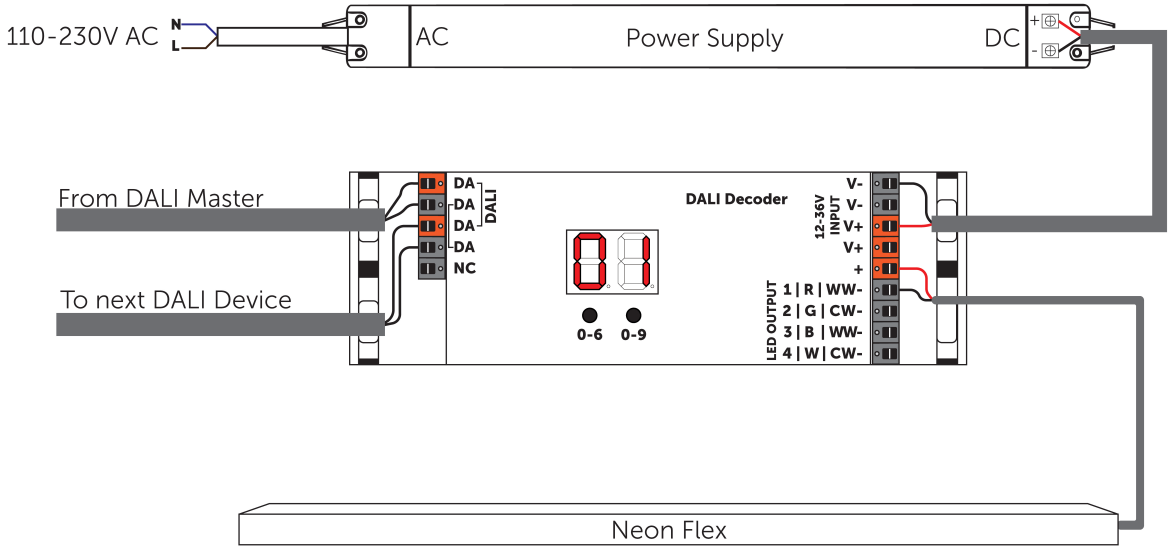
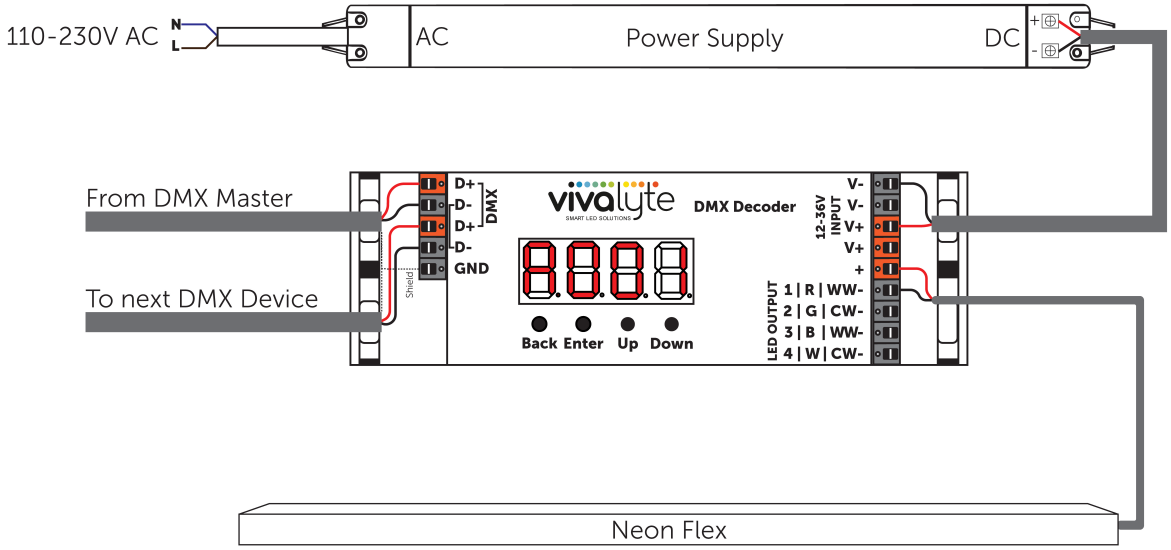
## System Diagram: DMX