

## Neon Flex

### Product Specification

Color type	<b>RGBW</b>
Output color	<b>Red,Green,Blue,3000</b>
CRI	<b>90</b>
Decoding IC	-
LED/ Pixel	-
Control type	<b>PWM</b>
Voltage (V)	<b>24</b>
Power (W/m)	<b>20.16</b>
Efficacy (Lm/W)	<b>19.2</b>
Luminous flux (Lm/M)	<b>394</b>
Beam angle (°)	<b>120</b>
Cutting interval (mm)	<b>71.42</b>
Maximum length single feed (m)	<b>5</b>
Maximum length double feed (m)	-
Width (mm)	<b>10</b>
Height (mm)	<b>17</b>
Bending radius (mm)	-
Weight (kg)	-
Operating temperature (°C)	<b>-20~+60</b>
Storage temperature (°C)	-
IP rating	<b>67</b>
Warranty (year)	-

Approvals




### Product information

Product category	<b>Neon Flex</b>
Neonflex type	<b>Sidebending</b>
Product name	<b>VNL-S10F-24-RGBW-30K</b>




### Technical drawing

## System Diagram: RF

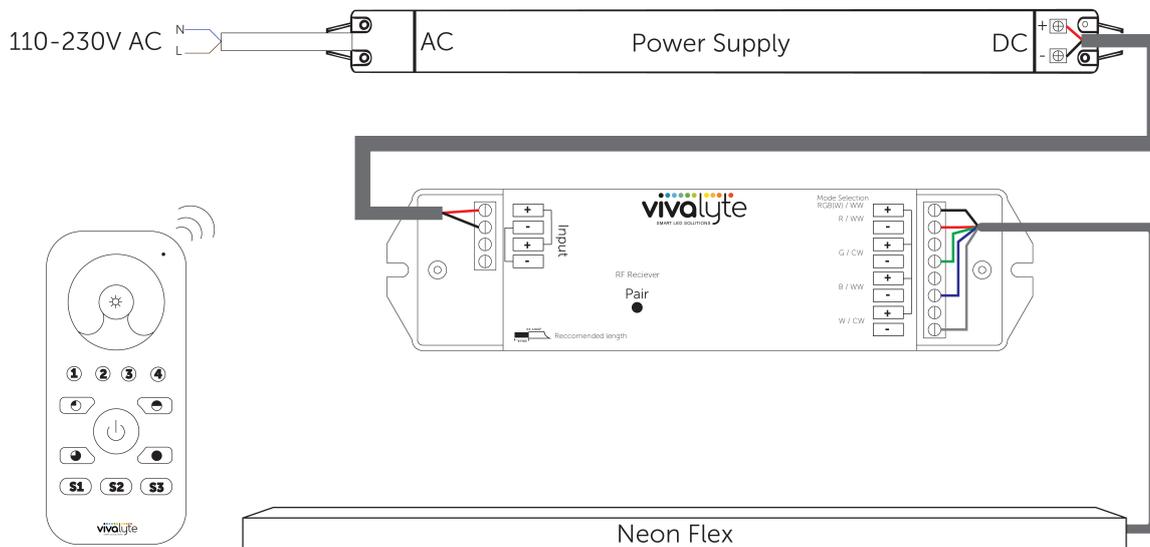

## System Diagram: DALI

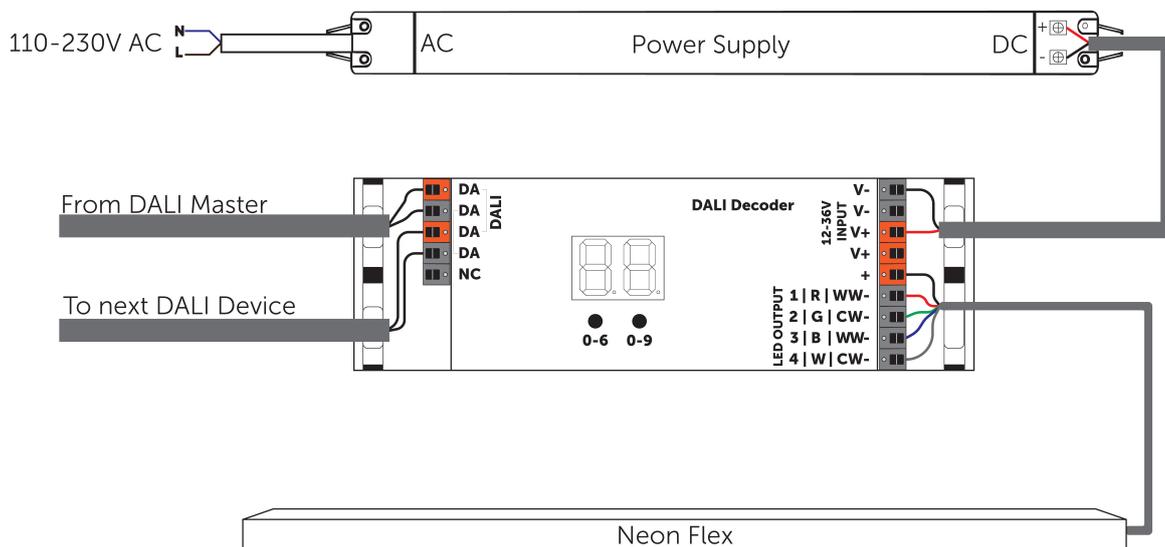

### System Diagram: DMX

