

## Neon Flex

## Product Specification

|                                |              |
|--------------------------------|--------------|
| Color type                     | Single Color |
| Output color                   | 2700         |
| CRI                            | 95           |
| Decoding IC                    | -            |
| LED/ Pixel                     | -            |
| Control type                   | PWM          |
| Voltage (V)                    | 24           |
| Power (W/m)                    | 19           |
| Efficacy (Lm/W)                | 67           |
| Luminous flux (Lm/M)           | 1276         |
| Beam angle (°)                 | 120          |
| Cutting interval (mm)          | 33           |
| Maximum length single feed (m) | -            |
| Maximum length double feed (m) | -            |
| Width (mm)                     | 40           |
| Height (mm)                    | 45           |
| Bending radius (mm)            | 500          |
| Weight (kg)                    | -            |
| Operating temperature (°C)     | -20~+60      |
| Storage temperature (°C)       | -20C to 70   |
| IP rating                      | 68           |
| Warranty (year)                | 5            |

## Approvals




## Product information

|                  |                    |
|------------------|--------------------|
| Product category | Neon Flex          |
| Neonflex type    | Sidebending        |
| Product name     | VNL-S40F-24-LE-27K |



## Technical drawing

## System Diagram: RF

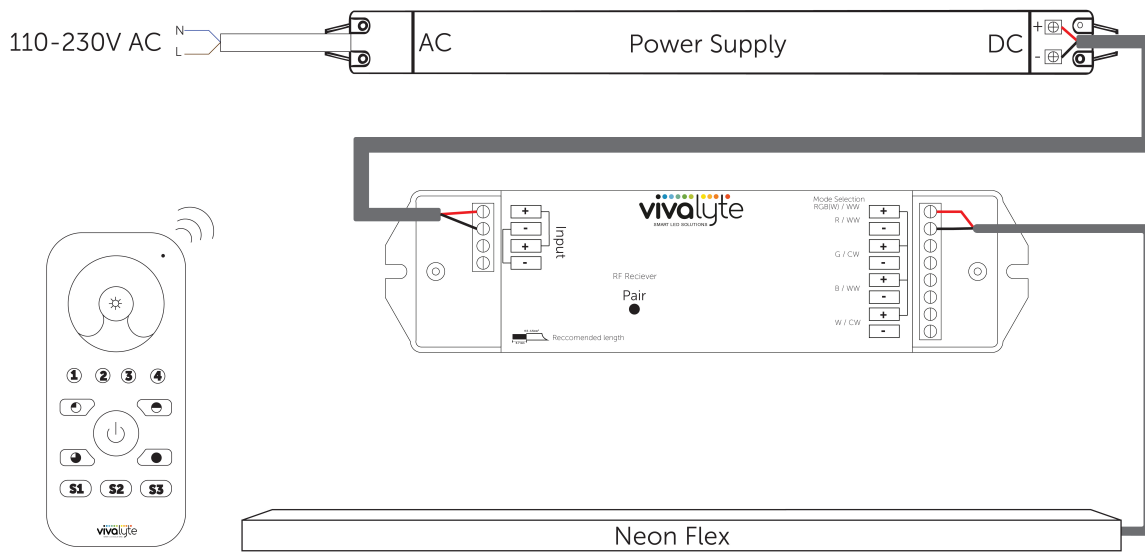

## System Diagram: DALI



## System Diagram: DMX

