

## Neon Flex

### Product Specification

|                                |              |
|--------------------------------|--------------|
| Color type                     | Single Color |
| Output color                   | 5000         |
| CRI                            | 80           |
| Decoding IC                    | -            |
| LED/ Pixel                     | -            |
| Control type                   | PWM          |
| Voltage (V)                    | 24           |
| Power (W/m)                    | 9.6          |
| Efficacy (Lm/W)                | 34.4         |
| Luminous flux (Lm/M)           | 329          |
| Beam angle (°)                 | 115          |
| Cutting interval (mm)          | 50           |
| Maximum length single feed (m) | 5            |
| Maximum length double feed (m) | 10           |
| Width (mm)                     | 4            |
| Height (mm)                    | 10           |
| Bending radius (mm)            | -            |
| Weight (kg)                    | -            |
| Operating temperature (°C)     | -20~+60      |
| Storage temperature (°C)       | -            |
| IP rating                      | 67           |
| Warranty (year)                | -            |

### Approvals




### Product information


|                  |                |
|------------------|----------------|
| Product category | Neon Flex      |
| Neonflex type    | Sidebending    |
| Product name     | VNL-S4F-24-50K |




### Technical drawing

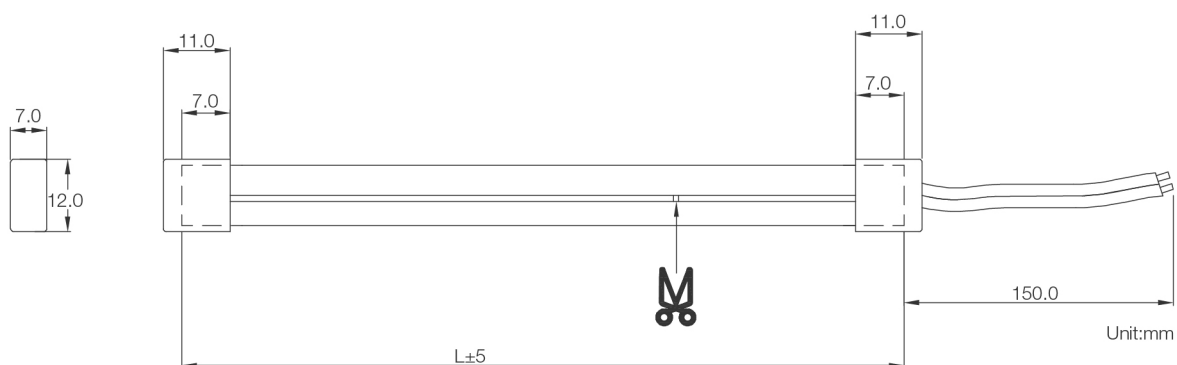

### System Diagram: RF

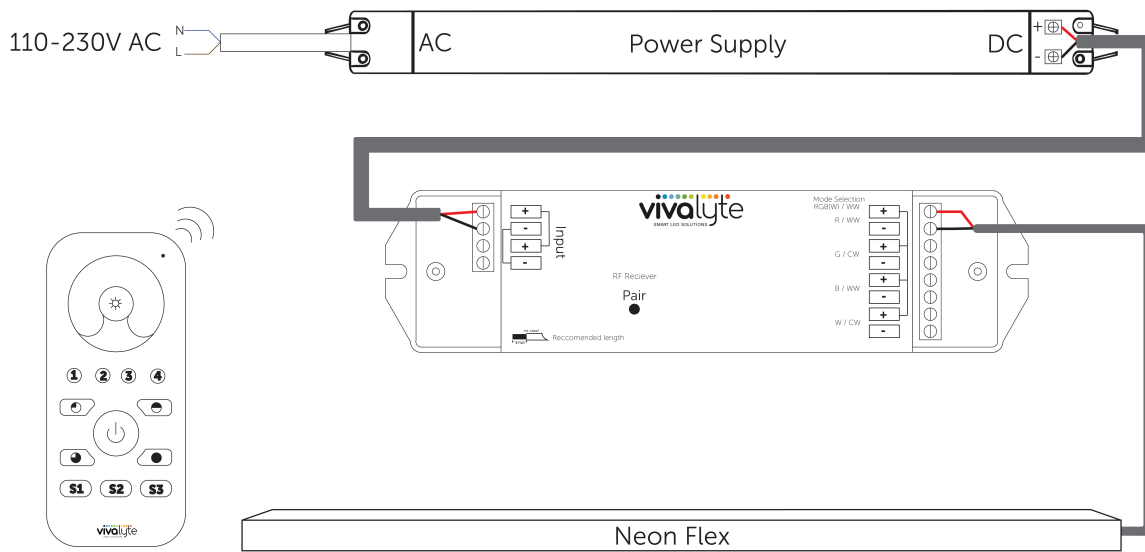

### System Diagram: DALI

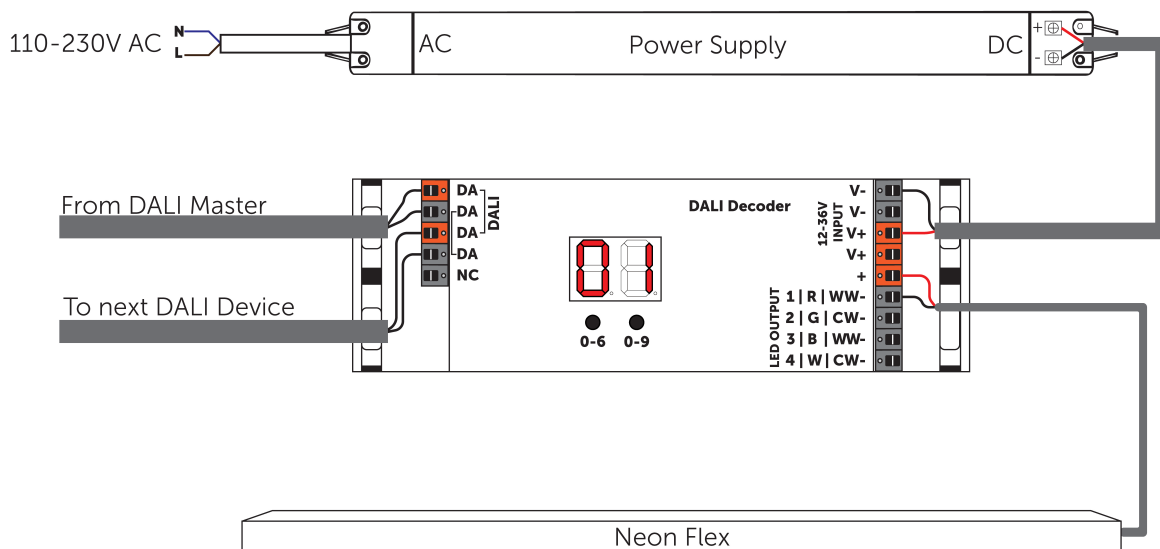

## System Diagram: DMX

