



Features //

- Input voltage: DC24V
- CREE single color LED, color mixing well, excellent light performance and stability
- Can be connected with external controller, and achieve full-color effect
- Beam angle 10*60°, better light effect and longer shooting distance
- Aluminum PCB and backside with heat conductive adhesive tape, better heat diffusion

Application //

Applied for full-color light boxes and projects

2525 non-waterproof full-color rigid bar

Installation

Fixed by screw

Specifications

Part No.	VSL-VRGB-0509
Light color	Full-color
Wave length (nm)	R 620-625 G 520-525 B 465-470
Beam Angle(°)	10x60°
Luminous Flux(lm)	800
RA	/
Light Efficiency(lm/w)	42
Voltage	24V DC
Power(W/pcs)	≤19
Standard Serial connection Qty (pcs)	4
Max.Standard Serial connection Qty (pcs)	4
Operating Temperature(°C)	-25~+60
Storage Temperature(°C)	-25~+70

Remark:

- The test temperature is 25±2;
- Typical data as above, may some difference with reasonable fluctuation range.

VIVALYTE BVBA


Tel: +32 56 42 65 35

Mail: info@vivalyte.com Web.: www.vivalyte.com


Add: Kouterstraat 6, Wevelgem, B-8560, Belgium VAT: BE500611159

Dimension //

Unit:mm[in]

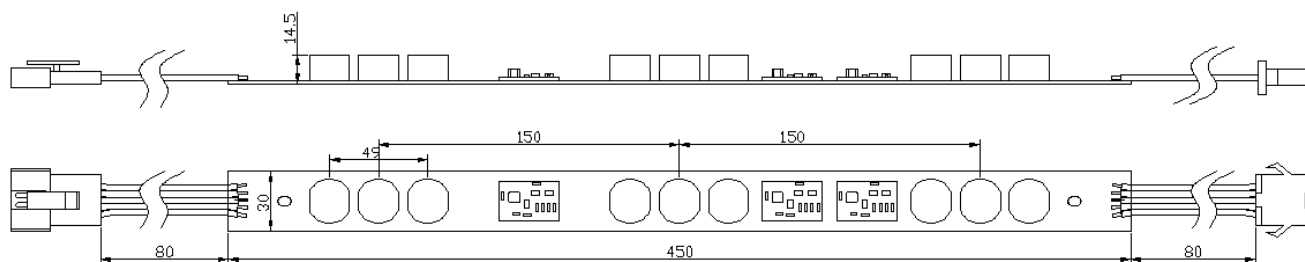

Luminous Intensity Distribution Diagram //

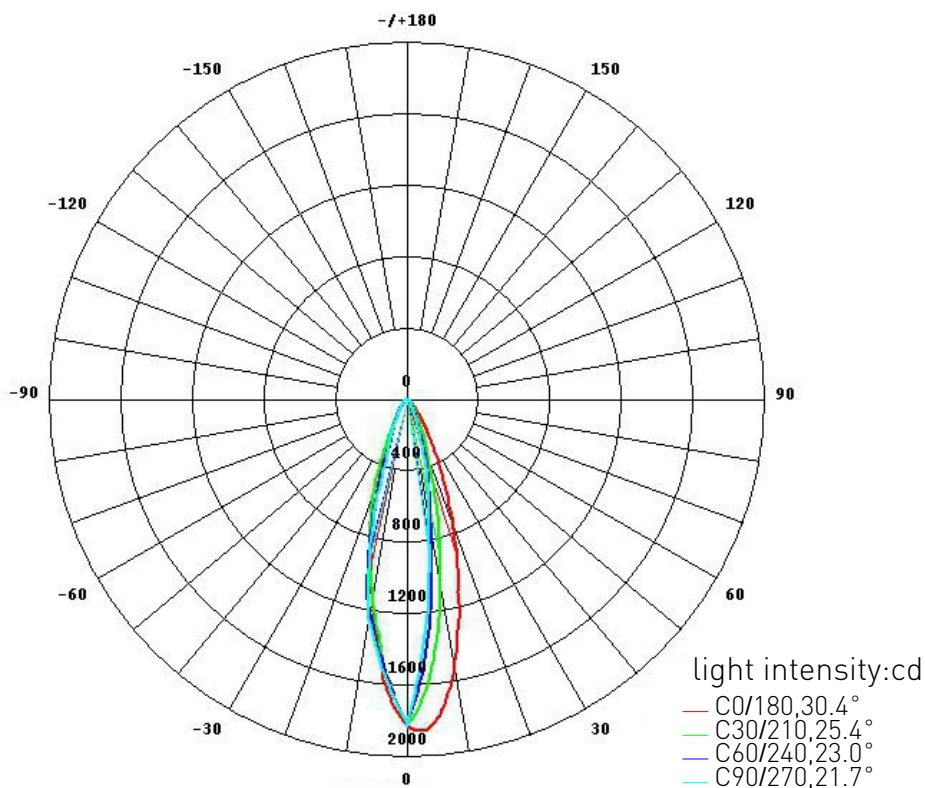

THE AVERAGE BEAM ANGLE(50%):25.1 DEG


VIVALYTE BVBA

Tel: +32 56 42 65 35

Mail: info@vivalyte.com Web.: www.vivalyte.com

Add: Kouterstraat 6, Wevelgem, B-8560, Belgium VAT: BE500611159

Package

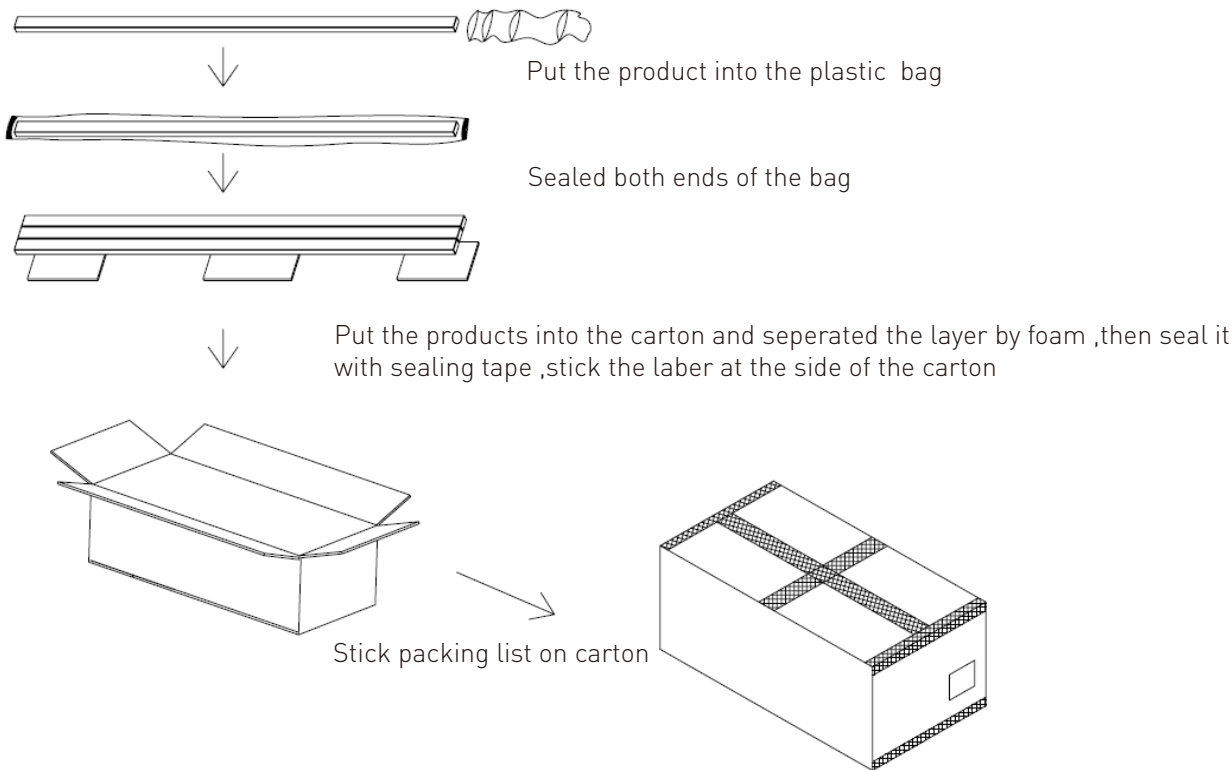

Packing details:

- 1.Packaged by PE transparent pocket, with normal export carton;
- 2.Packing size: 550*400*340mm;
- 3.

Part No.	Product size	Qty per carton	Net weight (NW/kg)	Gross weight (GW/kg)
VSL-VRGB-0509	450*30	100	10.7[1±10%]KG	12.2[1±10%]KG

4.Above mentioned quantity and weight are based on above packing method only, quantity and weight differs when applying other packing, please refer to actual situation.